

Micro válvula - Tubo/Rosca macho cilíndrico - RPS PG



Rosca macho BSPP

G 1/8

Para tubo Ø ext. (mm)

6

Presión de uso

0 a 10 bar

Temperatura

0°C a + 60°C


Material

Polímero y latón níquelado

Descripción

Referencia	Rosca macho BSPP	Para tubo Ø ext. (mm)
RPS PG0600	G 1/8	6
RPS PG0601	G 1/4	6
RPS PG0602	G 3/8	6
RPS PG0800	G 1/8	8
RPS PG0801	G 1/4	8
RPS PG0802	G 3/8	8

Referencia	Rosca macho BSPP	Para tubo Ø ext. (mm)
RPS PG1001	G 1/4	10
RPS PG1002	G 3/8	10
RPS PG1003	G 1/2	10
RPS PG1201	G 1/4	12
RPS PG1202	G 3/8	12
RPS PG1203	G 1/2	12

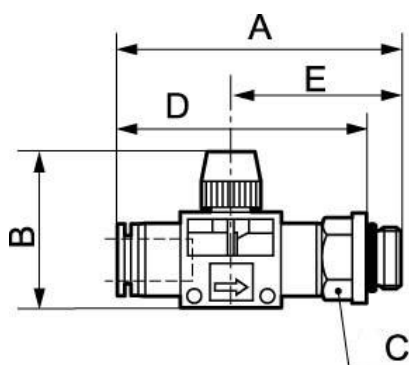

Dimensions

Referencia	A mm	B mm	C mm	D mm	E mm
RPS PG0600	58	40.3	14	52.5	32.5
RPS PG0601	58	40.3	14	52	32.5
RPS PG0602	59.5	40.3	17	53	34
RPS PG0800	58.3	40.3	14	52.8	32.5
RPS PG0801	58.3	40.3	14	52.3	32.5
RPS PG0802	59.8	40.3	17	53.3	34
RPS PG1001	70.1	44.5	17	64.1	39
RPS PG1002	69.6	44.5	17	63.1	38.5
RPS PG1003	71.1	44.5	21	63.1	40
RPS PG1201	70.8	44.5	17	64.8	39
RPS PG1202	70.3	44.5	17	63.8	38.5
RPS PG1203	71.8	44.5	21	63.8	40