

Codo 90° macho cilíndrico orientable - RMC MG



Rosca macho BSPP

G 1/8

Para tubo Ø ext. (mm)

4

Presión de uso

0 a 15 bar

Temperatura

-20°C a +80°C


Material

Latón niquelado

Descripción

Referencia	Rosca macho BSPP	Para tubo Ø ext. (mm)
RMC MG0400	G 1/8	4
RMC MG0401	G 1/4	4
RMC MG0600	G 1/8	6
RMC MG0601	G 1/4	6
RMC MG0800	G 1/8	8
RMC MG0801	G 1/4	8
RMC MG0802	G 3/8	8
RMC MG1001	G 1/4	10
RMC MG1002	G 3/8	10
RMC MG1003	G 1/2	10
RMC MG1201	G 1/4	12
RMC MG1202	G 3/8	12

Referencia	Rosca macho BSPP	Para tubo Ø ext. (mm)
RMC MG1203	G 1/2	12
RMC MG1403	G 1/2	14

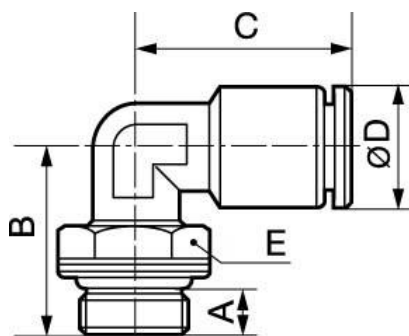

Dimensions					
Referencia	A mm	B mm	C mm	D mm	E mm
RMC MG0400	6	21	21	10	13
RMC MG0401	8	25	21	10	16
RMC MG0600	6	21	24	12.5	13
RMC MG0601	8	25	25.5	12.5	16
RMC MG0800	6	22.5	26	14	13
RMC MG0801	8	25	26	14	16
RMC MG0802	9	30.5	27.5	14	19
RMC MG1001	8	27	30	16.5	16
RMC MG1002	9	30.5	30	16.5	19
RMC MG1003	11	32	31	16.5	22
RMC MG1201	8	28	34.5	19	16
RMC MG1202	9	34	34.5	19	19
RMC MG1203	11	31.5	34.5	19	22
RMC MG1403	11	34.5	37.5	21.5	22